



The  
Patent  
Office

PHGB000006  
USA



INVESTOR IN PEOPLE

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ


JC974 U.S. PTO  
09/759182  
01/12/01

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

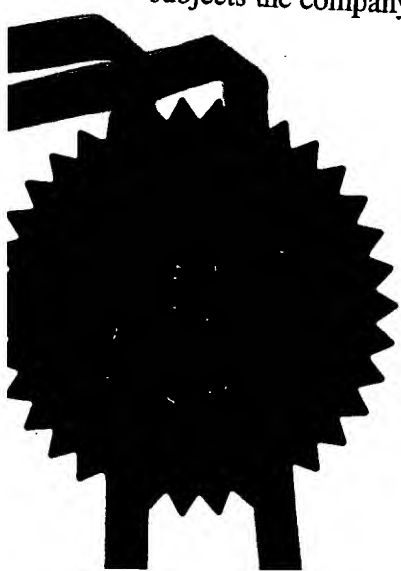


Signed

*M. C. Jenkins*

Dated

11 April 2000

**This Page Blank (uspto)**

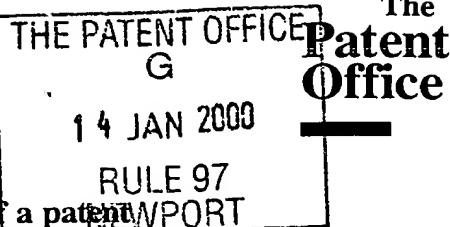

The  
Patent  
Office

1/77

**Request for grant of a patent**  
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

17JAN00 E505468-1 002679  
P01/7700 0.00-0010373-0

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	PHGB 000006	14 JAN 2000
2. Patent application number (The Patent Office will fill in this part)	0000873.0	
3. Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS	
Patents ADP Number ( <i>if you know it</i> )	749294001	
If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS	
4. Title of the invention	INTERCONNECTION OF AUDIO/VIDEO DEVICES	
5. Name of your agent ( <i>if you have one</i> ) "Address for service" in the United Kingdom to which all correspondence should be sent ( <i>including the postcode</i> )	ANDREW GORDON WHITE Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA	
Patents ADP number ( <i>if you know it</i> )	713347302	
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and ( <i>if you know it</i> ) the or each application number	Country	Priority Application number ( <i>if you know it</i> )
		Date of filing ( <i>day/month/year</i> )
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing ( <i>day/month/year</i> )
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? ( <i>Answer "Yes" if:</i> a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES	

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	7 (x2)
Claims(s)	3 (x2)
Abstract	1 (x2)
Drawings	2 (x2)

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents  
Statement of inventorship and right  
to grant of a patent (*Patents Form 7/77*)  
Request for preliminary examination and  
search (*Patents Form 9/77*)  
Request for substantive examination  
(*Patents Form 10/77*)  
Any other documents  
(Please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 13-1-00

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815299

(A. G. WHITE)

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes". *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

## INTERCONNECTION OF AUDIO/VIDEO DEVICES

5       The present invention relates to systems composed of a plurality of devices clustered for the exchange of data, preferably audio and/or video data and control messages, via wired or wireless link and, in particular although not essentially, to such systems where different data components from a source device are to be routed to respective and separate other devices of the  
10 system. The invention further relates to source devices for use in such systems.

Networking or interconnection of devices has long been known and used, starting from basic systems where different system functions have been  
15 provided by separate units, for example hi-fi or so-called home cinema systems. A development has been the so-called home bus systems where a greater variety of products have been linked with a view to providing enhanced overall functionality in for example domestic audio/video apparatus coupled with a home security system and the use of telephone. An example of such a  
20 home bus system is the domestic digital bus (D2B), the communications protocols for which have been issued as standard IEC 1030 by the International Electrotechnical Commission in Geneva, Switzerland. The D2B system provides a single wire control bus to which all devices are interfaced with messages carried between the various devices of the system in a  
25 standardised form of data packet.

A particular problem that can occur with distributed systems such as hi-fi and home cinema is loss of synchronisation between different components required to be presented to a user simultaneously. This is particularly noticeable where the loss of synchronisation is between sequences of video  
30 images and an accompanying soundtrack, or between different audio components intended to be presented by different devices, particularly in a surround-sound or home-cinema installation. This loss of synchronisation may

occur due differences in the effective lengths of the transmission paths for the differing components, or it may be due to different latencies in decoders for the different components.

One way to approach the synchronisation problem, where all the  
5 components are decoded within a single device, is described in US 5,430,485 (Lankford et al) which describes a receiver for decoding associated compressed video and audio information components transmitted in mutually exclusive frames of data, each with a respective presentation time stamp. A coarse synchronisation is applied by selectively dropping frames of one or  
10 other of the components and then fine tuning by adjusting the audio stream clock frequency.

Another approach, this time closer to the source for different components being sent out, is described in US 5,594,660 (Sung et al) which provides an audio/video decoder/decompressor for receiving and separating  
15 the components of an encoded and compressed data stream. Within the decoder/decompressor, Sung has means for breaking up a compound AV stream and then applying an appropriate temporal offset to each stream to achieve synchronisation of the outputs during playback. The differential buffering by FIFO units follows the system decoder but precedes the decoding  
20 of the audio or of the video.

Although handling the component delays with the components still encoded generally involves less processing, handling of synchronisation at source can create its own problems when it comes to avoiding conflict for transport resources to get the offset streams to their destination without  
25 introducing further delays (and hence un-synchronising the streams) and/or requiring separate and parallel signal paths for the separated components.

It is accordingly an object of the present invention to provide a networked system of devices including means for synchronising components  
30 from source whilst avoiding the creating of delays through competition between source and destination.

In accordance with the present invention there is provided a data

processing system comprising a cluster of devices interconnected for the communication of data in streams, wherein one of said devices is a source device for at least two data streams to be sent to one or more other devices as destination devices of said cluster, said source device including: buffering  
5 means arranged to apply a respective delay to at least one of said at least two data streams; and multiplexing means coupled with said buffering means and arranged to combine said at least two streams into a single data stream for transmission; the system further comprising a first data channel linking said source and destination devices and carrying said data stream for transmission  
10 from the source device to the or each destination device. By applying the respective delays at source, the amount of signal buffering received by the destination devices is kept to a lower level, whilst the multiplexing of the signal streams with latency offsets applied reduces congestion problems arising from separate streams competing for transmission pathways.

15 The source device may further comprise an input to receive the said at least two data streams from a remote source (such as a further connected device or perhaps an internal utility such as an optical disc reader). With such an arrangement, where the at least two data streams are multiplexed together when received by said source device, the source device suitably further  
20 comprises demultiplexing means coupling the input and the buffering means and arranged to separate said streams prior to buffering.

In a preferred embodiment, the aforementioned at least two data streams comprise digital video data and audio data (which may be digital audio data) respectively, wherein the digital video data may have a different destination  
25 device to the audio data.

To allow further treatments to the signals to be sent out, the source device may further comprise data processing means interposed in the signal path between the buffering and multiplexing means.

The present invention also provides a data processing apparatus  
30 comprising the technical features of a source device in a system as recited hereinabove and as claimed in the claims attached hereto, to which the readers attention is now directed.

Further features and advantages of the present invention will become apparent from reading of the description of preferred embodiments of the invention, given by way of example only and with reference to the  
5 accompanying drawings, in which:

Figure 1 represents an arrangement of three interconnected devices forming an audio/video cluster;

Figure 2 represents a first application of differential delays applied to separate components from a first source;

10 Figure 3 represents an alternative application of delays to that of Figure 2; and

Figure 4 represents an alternative (wireless) interconnect mechanism suitable to embody the present invention.

15 A first arrangement of interconnected devices is shown in Figure 1, with three devices 10, 12, 14 forming a cluster 16 based around a respective bus 18 supporting communication in accordance with IEEE Standard 1394 connect and communications protocols. In the following example, reference is made to IEEE 1394, and the disclosure of the specification of this protocol is  
20 incorporated herein by reference. As will be recognised by the skilled reader, however, conformance with such protocol is not essential to the operation of the present invention.

The devices in the cluster 16 comprise a source device 10 coupled via bus 18 to a television 12 for showing the image component of a combined AV  
25 stream from the source, and an audio processor and playback system 14 for reproducing the audio component of the AV stream. The source device 10 comprises an audio stream buffer 20 and a video stream buffer 22 for receiving separate input components from a remote signal source 24. As shown, the separate source components A and B are combined in a multiplexer 26 with the  
30 source device 10 having a corresponding demultiplexer 28 to separate the components prior to loading them into the respective buffers 20, 22.

Under the direction of a controlling processor 30, the buffers are used to



apply a respective delay to at least one of the two data streams to combat the differing processing latencies in the video 12 and audio 14 destination devices, as will be described in further detail hereinafter with respect to Figures 2 and 3. Also under the direction of the processor 30, a multiplexer stage 32  
5 remultiplexes the temporally offset audio and video from the respective buffers to combine the two streams into a single data stream for transmission via the 1394 bus 18.

Whilst the signals in the respective buffers 20, 22 may simply be read out and recombined, the source device optionally further comprises data processing  
10 means interposed in the signal path between the buffers 20, 22 and the multiplexer 32. As shown, this further data processing means may take the form of an audio signal processor ASP 34 on the output to the audio signal buffer and a video signal processor VSP 36 on the output to the video signal buffer. The ASP 34 may be used for tasks such as conversion from AC3 or  
15 MPEG Audio to LPCM, such that only the source device would then require a decoder for these formats. The video processing by VSP 36 could include overlaying graphics and/or various forms of re-encoding, for example to identify MPEG I-fields. Whilst the output from the audio buffer 20 is typically passed to the multiplexer 32 in digitised form, an analogue audio signal may be required  
20 for communication with other (non 1394-compliant) devices and, to this end the ASP 34 may include a D/A converter (not shown) such as to provide an analogue audio output 38. Alternately, the ASP 34 might act as a gateway to a second cluster 37 by providing a link 39 supporting conversion to (and optionally from) a different interconnect protocol such as IEC958: this arrangement has  
25 particular value when, for example, it is desired to watch a digital video on television 12 conforming to IEEE1394 whilst listening to the audio on a slightly older system conforming to IEC958.

The first and second data streams (audio and video) may be encoded according to a first communications protocol such as MPEG1 or 2, and the  
30 destination devices 12, 14 are each provided with a respective decoder 40, 42 operating according to the said protocol.

Turning now to Figure 2, the differential delays applied are illustrated with

a data source DS 24 outputting digital video DV and digital audio DA to respectively a digital television 44 and a digital amplifier 46 via respective buffers 48, 50. The digital source 24 may comprise, for example, a DVD player and the digital TV 44 may be provided with an MPEG2 decoder to handle the  
5 coded video from the source, and the digital amplifier may be provided with an AC3 decoder for the coded audio. Typically, the latency of the AC3 decoder will be of the order of 10ms as against 500ms for the MPEG2 decoder. Consequently, to maintain synchronism between the audio and video playback, the audio signal is delayed in the buffer 50 by  $(500 - 10) = 490\text{ms}$ , with the digital  
10 video being pipelined directly through the video buffer 48 with no delay.

Figure 3 shows an alternative scenario to that of Figure 2: in this case, the source 24.A outputs an analogue audio signal AA via analogue delay line 54 to analogue amplifier 52. In the absence of any specific coding, the latency of the analogue amplifier is assumed negligible and consequently the delay  
15 introduced by buffering (in delay line 54) must be  $(500 - 0) = 500\text{ms}$ . Other variations are, of course, possible with the output from source 24.A instead comprising a digital audio stream but, unlike the Figure 2 embodiment, the video and audio streams conform to separate protocols (such as IEEE 1394 for the video and IEC958 for the audio) with respective delay settings being as for the  
20 digital plus analogue case of Figure 3, or varied in dependence on the actual settings, as will be recognised by the skilled reader.

From reading the present disclosure, other modifications and variations will be apparent to persons skilled in the art, including equivalents and features which are already known in the field of bus-connected and cordless  
25 communication systems and components and which may be used instead of or in addition to features already disclosed herein. For example, as shown by Figure 4, the source 58 may comprise an optical or magnetic disk reader and, instead of a digital data bus, the data channel from source 60 to destination devices 62, 64, 66 may be a wireless communications link 68 for which each of  
30 the destination devices is provided with at least a receiver and the source device is provided with at least a transmitter. The system may comprise many more devices than illustrated herein including, for example, two or more source

devices, and some devices of the system may have the technical features of both source and destination (for example a video cassette record and playback deck) with the appropriate source/destination behaviour being selected in dependence on the context.

- 5           In the foregoing we have described a data processing system comprising a cluster of devices interconnected for the communication of data in streams, particularly digital audio and/or video data. One of the devices is a source device for at least two data streams to be sent to one or more other devices as destination devices of the cluster. To enable synchronisation of the stream
- 10 presentations by the destination devices, the source device includes buffers to apply a respective delay to at least one of the data streams, followed by a multiplexer arranged to combine the streams into a single data stream for transmission via a data channel linking the source and destination devices.

## CLAIMS

1. A data processing system comprising a cluster of devices  
5 interconnected for the communication of data in streams, wherein one of said  
devices is a source device for at least two data streams to be sent to one or  
more other devices as destination devices of said cluster, said source device  
including:

buffering means arranged to apply a respective delay to at least one of  
10 said at least two data streams; and

multiplexing means coupled with said buffering means and arranged to  
combine said at least two streams into a single data stream for transmission;

the system further comprising a first data channel linking said source and  
destination devices and carrying said data stream for transmission from the  
15 source device to the or each destination device.

2. A system as claimed in Claim 1, wherein said source device  
further comprises an input to receive said at least two data streams from a  
remote source.

20

3. A system as claimed in Claim 2, wherein said at least two data  
streams are multiplexed together when received by said source device, said  
source device further comprising demultiplexing means coupling said input and  
said buffering means and arranged to separate said streams prior to buffering.

25

4. A system as claimed in Claim 1, wherein said at least two data  
streams comprise digital video data and audio data respectively, wherein the  
digital video data has a different destination device to the audio data.

30

5. A system as claimed in Claim 4, wherein said audio data is digital  
audio data.

6. A system as claimed in any of Claims 1 to 5, wherein said source device further comprises data processing means interposed in the signal path between said buffering means and said multiplexing means.

5 7. A system as claimed in any preceding Claim, wherein the first and second data streams are encoded according to a first communications protocol, and the or each destination device comprises a respective decoder operating according to said protocol.

10 8. A system as claimed in Claim 1, wherein said first data channel is a digital data communication bus to which the devices are respectively interfaced, with said multiplexed data streams being carried thereupon as discrete data packets.

15 9. A system as claimed in Claim 1, wherein said first data channel is a wireless communications link for which each of the destination devices is provided with at least a receiver and said source device is provided with at least a transmitter.

20 10. A system as claimed in any preceding Claim, comprising two or more source devices.

11. A system as claimed in Claim 10, wherein at least one of said two or more source devices further comprises the technical features of a destination  
25 device of the system.

12. Data processing apparatus comprising the technical features of a source device in a system as claimed in any of Claims 1 to 9.

30 13. Data processing apparatus as claimed in Claim 12, further comprising the technical features of a destination device in a system as claimed in any of Claims 1 to 9.

14. A data processing system comprising a cluster of devices interconnected for the communication of data in streams substantially as hereinbefore described with reference to the accompanying drawings.

5 15. A data processing apparatus for use as a source device in a system comprising a cluster of devices interconnected for the communication of data in streams substantially as hereinbefore described with reference to the accompanying drawings.

## ABSTRACT

## INTERCONNECTION OF AUDIO/VIDEO DEVICES

5

A data processing system comprises a cluster of devices (16) interconnected for the communication of data in streams, particularly digital audio and/or video data. One of the devices (10) is a source device for at least two data streams to be sent to one or more other devices (12, 14) as destination  
10 devices of the cluster. To enable synchronisation of the stream presentations by the destination devices, the source device (10) includes buffers (20, 22) arranged to apply a respective delay to at least one of the data streams, followed by a multiplexer (32) arranged to combine the streams into a single data stream for transmission via a first data channel (18) linking said source (10)  
15 and destination (12, 14) devices. The source device may include data processing means (34, 36) interposed in the signal path between the buffers and multiplexer.

(Figure 1)

20





1/2

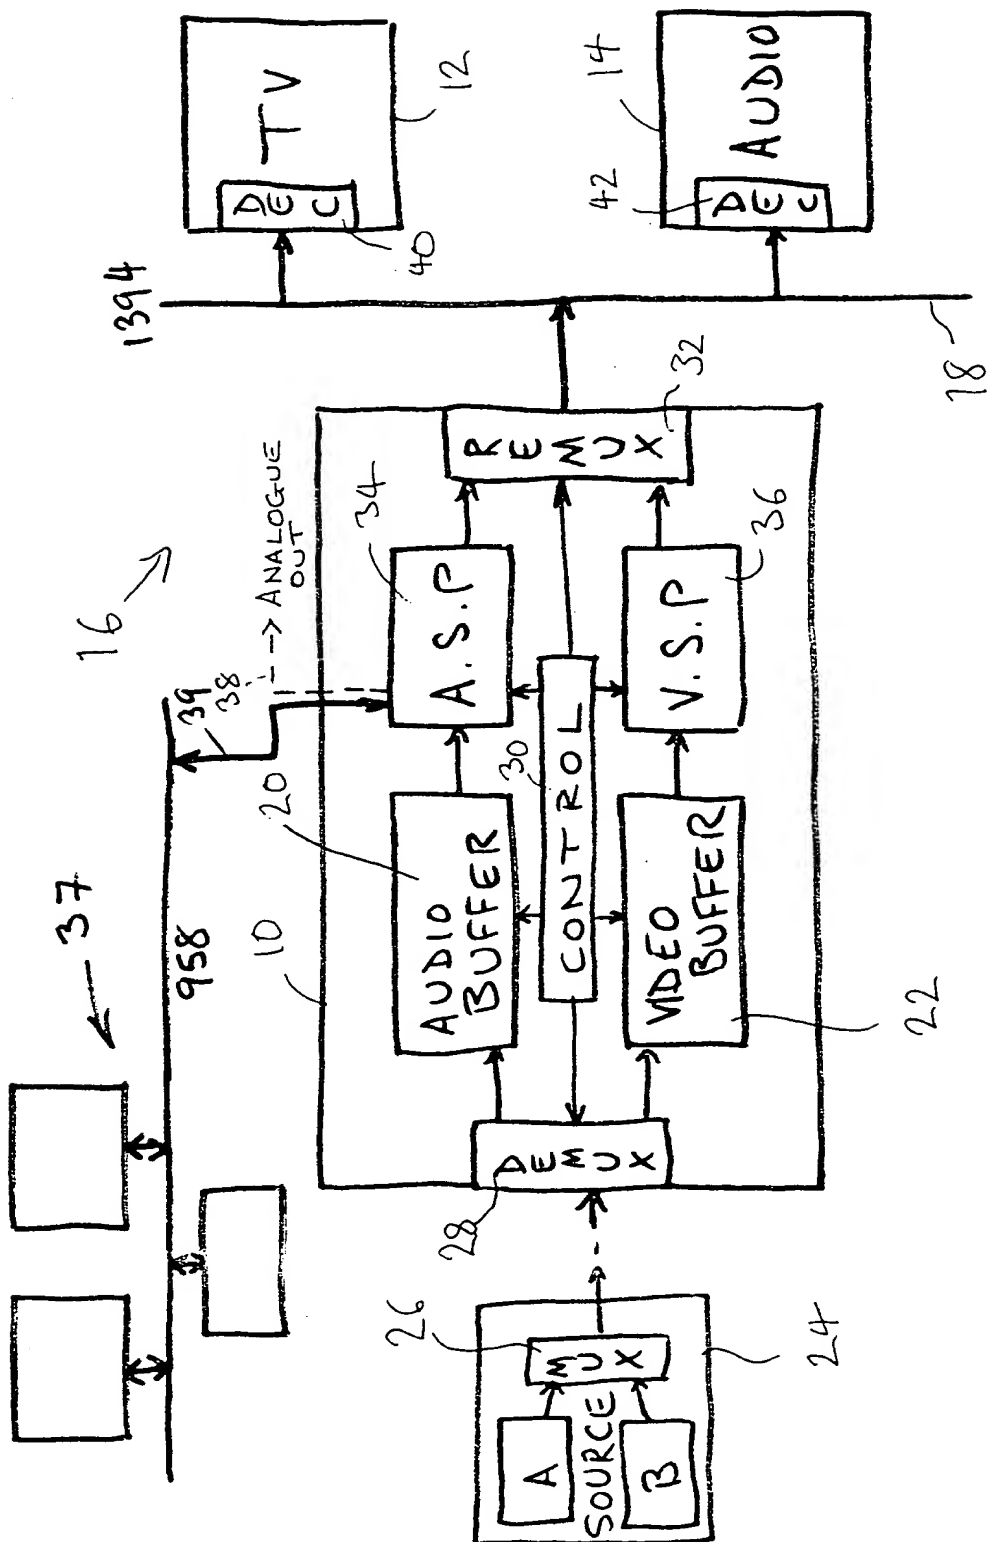


FIG. 1



2/2

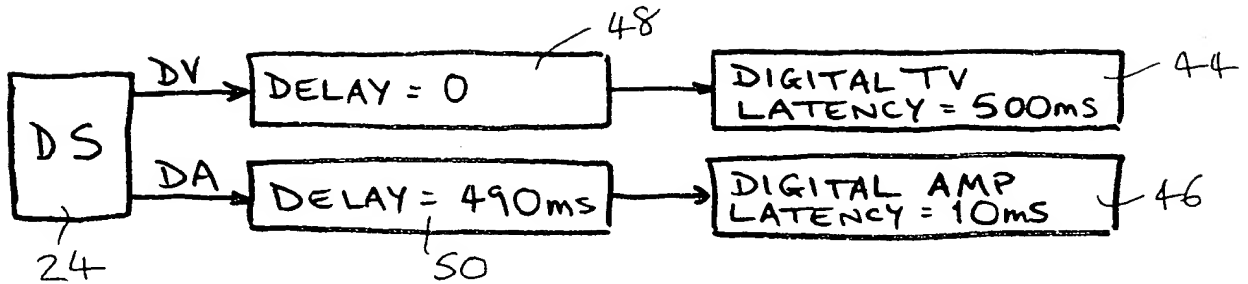


FIG. 2

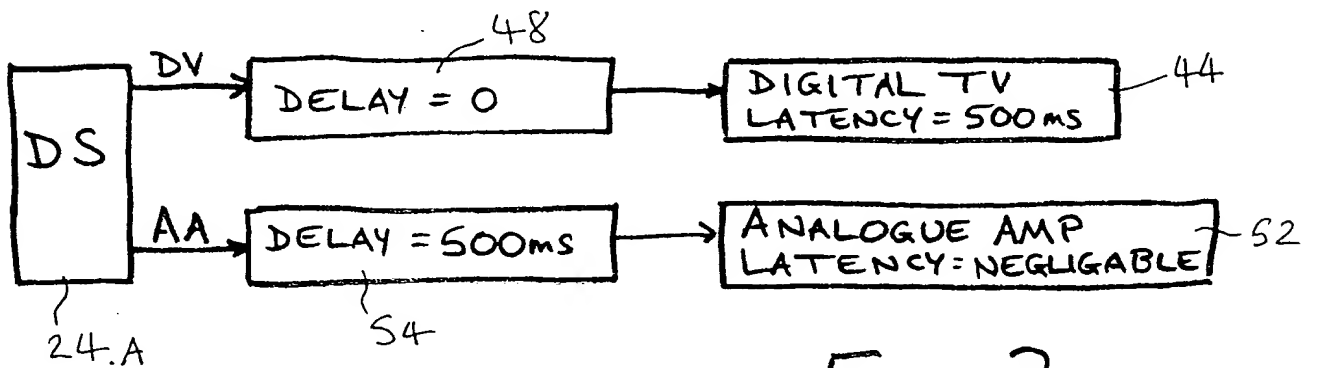


FIG. 3

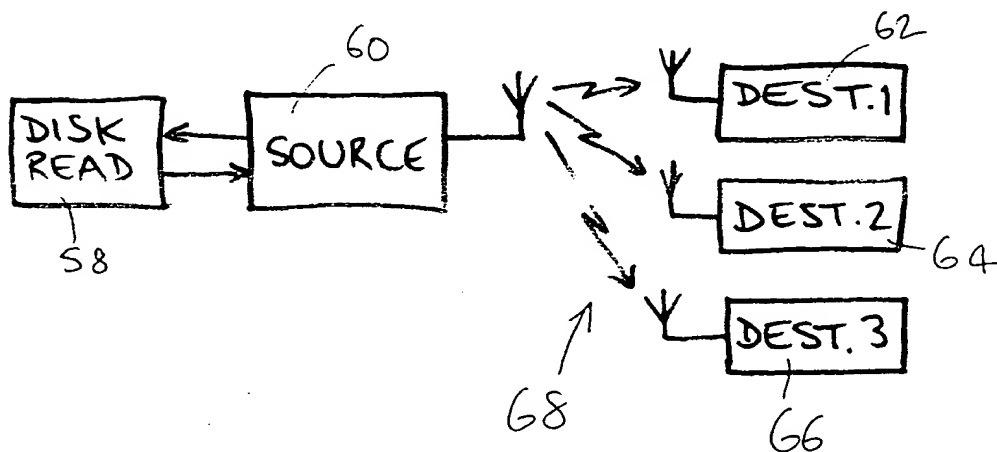


FIG. 4

**This Page Blank (uspto)**